
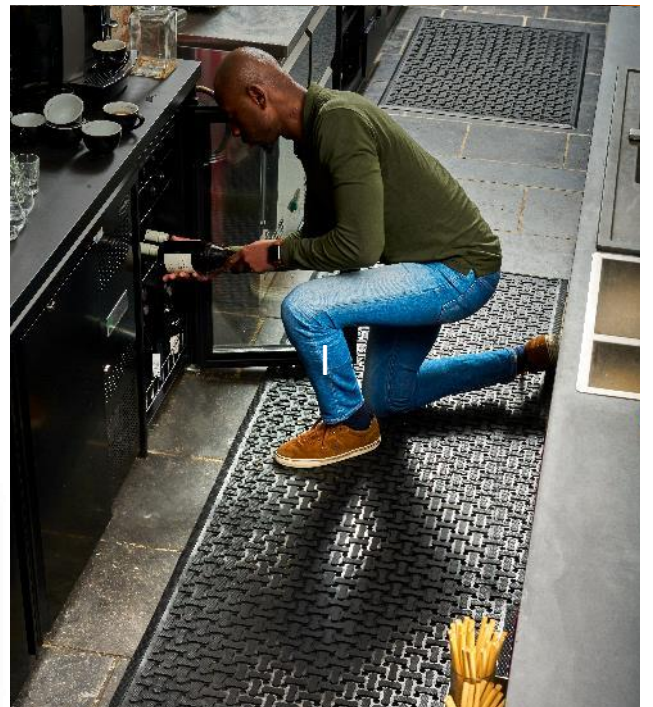


# Comfort Flow

→ ANTI-FATIGUE • INDOOR

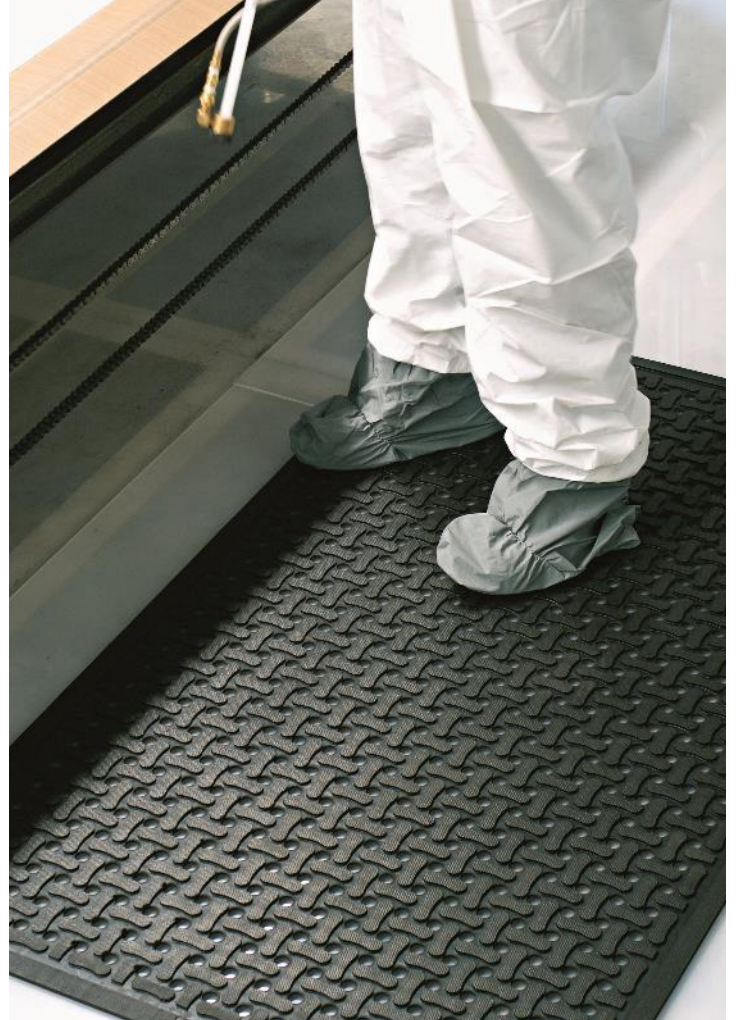



## → WHY CHOOSE THIS MAT?

**Comfort Flow is a flow-through mat with excellent anti-fatigue properties designed for wet areas where grease, oil, and chemicals may be present.**

- **Comfortable** – High-density closed-cell nitrile rubber foam provides excellent anti-fatigue properties for employee comfort and ergonomic benefits
- **Clean** – Liquids and debris flow easily through the holes and away from shoes – **Anti-microbial** treatment provides lifetime protection from odors and degradation
- **Easy to clean** – Lightweight flexible design ensures easy handling and cleaning – 100% commercially launderable
- **Versatile** – Grease and oil proof; chemical resistant; welding safe
- **Safe** – Slip-resistant surface helps to minimize trip and fall accidents. Beveled edges provide a safe transition from the floor to the mat and allows carts to easily roll over the surface
- **Static Dissipative** certified allowing for use around sensitive electronic equipment

## → SPECIFICATIONS

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>         | <b>100% High density, closed-cell Nitrile rubber with 12% recycled reground in the rubber</b> for maximum resistance to water, oils, greases, chemicals, and animal fats                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Other properties</b> | <ul style="list-style-type: none"><li>• <b>Durometer:</b> 50 to 55</li><li>• <b>Thickness:</b> 9.5 mm</li><li>• <b>Weight:</b> 4,8 kg/m<sup>2</sup></li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Safety</b>           | <ul style="list-style-type: none"><li>• <b>Static Control:</b> ASTM C1028 Static Coefficient of Friction: Dry: 1, Wet: 0.91 Electrostatic Propensity of Carpets: Maximum Voltage Negative 0.3KV. Passes ATTCC Test Method 134-1991. ESD rating of static dissipative</li><li>• <b>Flammability:</b> Passes Flammability Standard DOC-FFI-70.</li><li>• <b>Anti-microbial</b> treated to guard against odours and degradation</li><li>• Passes fungal resistance standard <b>ASTM G21</b></li><li>• <b>Compression Deflection:</b> 43.8% at 20 psi, 55.7% at 40 psi</li></ul> |
| <b>Colour</b>           | Black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Recommended use</b>  | Recommended for indoor/outdoor use in wet or dry commercial or industrial environments including but not limited to commercial kitchens, restaurants, cafeterias, bars, food processing facilities, restrooms, and hospital scrub stations.                                                                                                                                                                                                                                                                                                                                  |



## → STANDARD SIZES

54 x 86    86 x 142    86 x 277

**Size Tolerance:** +/- 5%



# → CLEANING INSTRUCTIONS

## Comfort Flow mats can be cleaned in several different ways:

- 1. Commercially laundered (see Laundering Instructions).
- 2. Sterilized in an autoclave.
- 3. Washed in a commercial dishwasher (please check your local health code for restrictions).
- 4. Washed by hand using the following instructions:  
Scrub with a deck brush (as needed), using a detergent with a neutral pH.  
Rinse with a hose or pressure washer.  
Hang to dry.

Always make sure the mat is dry before placing it back in service.

### Laundering instructions

Comfort Flow mats can be commercially laundered to remove oil, grease, and soil.

The formula below does not require extensive mechanical action or drying. The main purpose of this formula is to dissolve grease and residue by using hot water to emulsify oils and grease.

Comfort Flow mats do not require extracting or drying. Lay mats flat following removal from the washer. Allow cooling before rolling.



|          |            |      |      |
|----------|------------|------|------|
| 1. Flush | 2-3 mins   | High | 49°C |
| 2. Break | 5 – 10 min | High | 60°C |
| 3. Rinse | 2 mins     | High | 49°C |
| 4. Rinse | 2 mins     | High | Cold |
| 5. Drain | 2 mins     | /    | /    |